




CFY21-2 / CFY21-2L



CFY41-2 / CFY41-2L

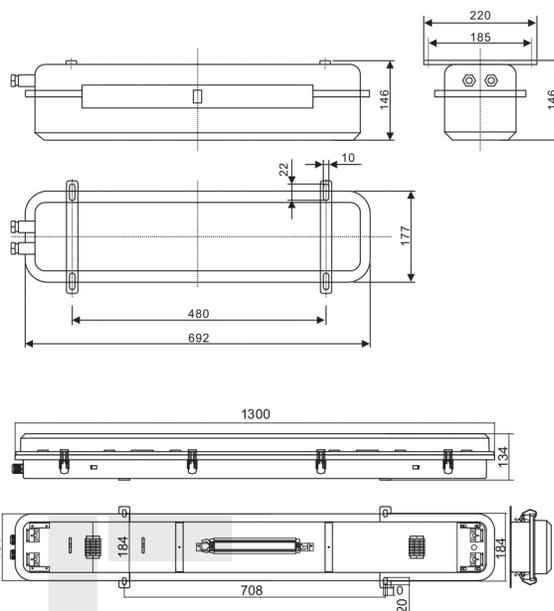

The scope of application

Applied to ship oil exploit platform, chemical product and explosive gas place zone 1 or zone 2.

Products characteristic

1. The shell is made of good quality steel, the lampshade is good quality transperance PC.
2. Integral type clip, high protection grade.
3. Flameproof safety type structure.
4. Approval by ATEX-B, certificate number TAZJ23091450681.

Production authentication

1. Conform to International IEC standard and GB3836、GB7000.
2. Passed the national low-voltage explosion-proof electrical appliance certificate CLEx20.9561.

Specifications

Type	Explosion-proof mark	Voltage	Power	Lamp holder	Protection class	Cable outside diameter	light source	Color temperature	Weight
CFY21-2	Ex db IIC T6 Gb	220V/50Hz 220V/60Hz 110V/60Hz	2×20W	G13	IP65	Φ11~ Φ13	LED	6000K	5.8kg
CFY21-2L			2×9W						5.6kg
CFY41-2L			2×18W						8kg
CFY41-2			2×40W						8.2kg