



SPECIFICATION FOR APPROVAL

CUSTOMER _____

MODEL NO. Z X F 8 0 3 0 Series

PART NO. _____

APPLICATION _____

ISSUE DATE _____

REV. NO. _____

REV.DATE 2020-3-5

FOR CUSTOMER APPROVAL	CHECKED BY
	Jason
	APPROVED BY





Applications

Can be used in zone 1, 2 and 21, 22

A wide range of hazardous areas where ignitable vapors, dust, moisture and corrosive elements are present

Areas with high energy costs

Typical applications include:

Oil and gas industries

Chemical, petrochemical

Pharmaceutical industries

Pulp and Paper

Waste and sewage treatment

Power Generation

Standard Materials

Housing: GRP material

Gasket: Silicon rubber

Certifications

ATEX

CNEX


CE

RoHS

ISO9001

Dimensions

(In millimeter)

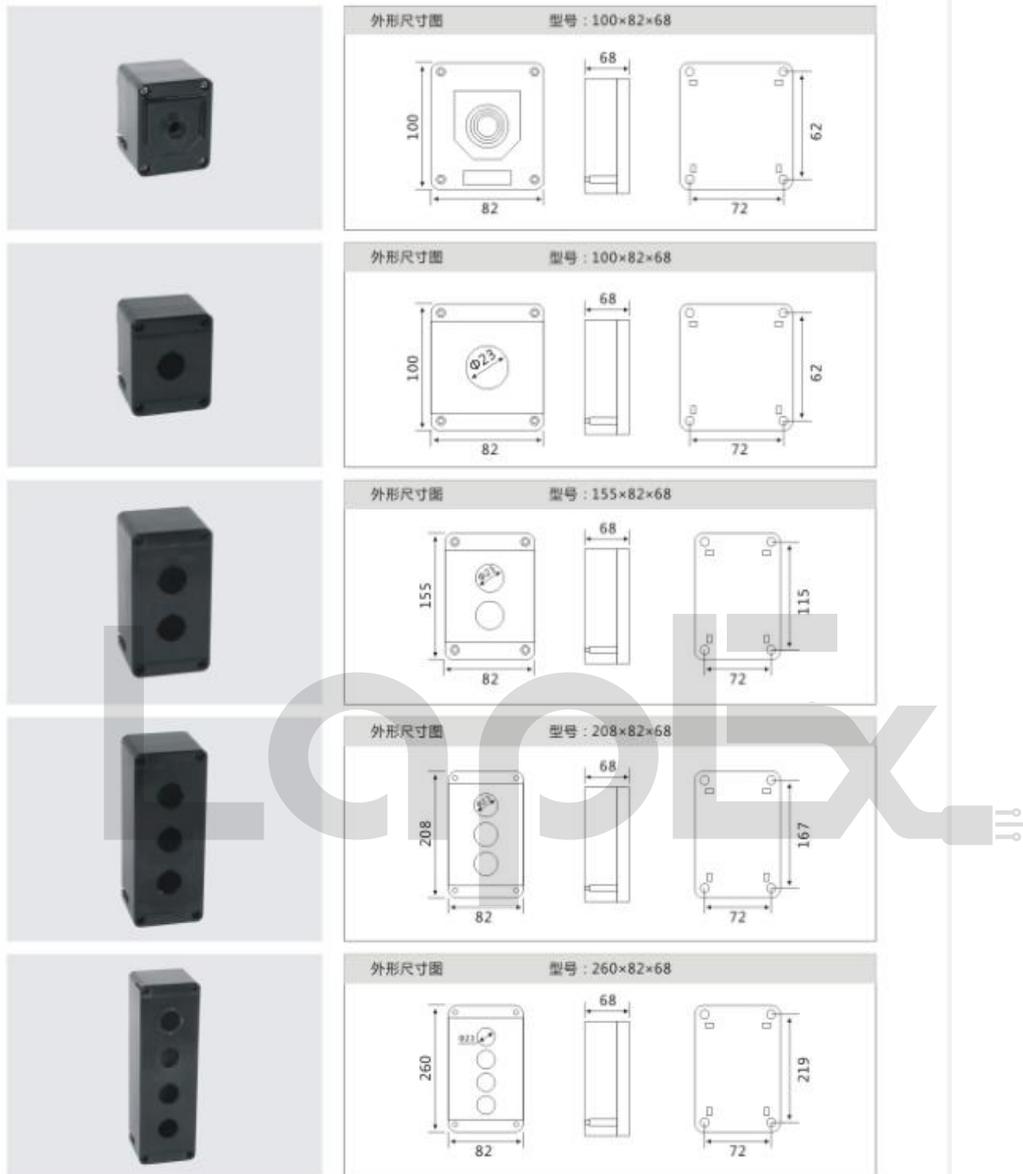

Electrical Data

Ex Marking	Ex db IIC T6 Gb/Ex tb IIIC T80°C Db
Classification	Group II, Category 2 GD;
IP Degree	IP66
Corrosion Resistant	WF2
Input Voltage	16A 220V
Power Factor	/
Conduit Entries	G 3/4"